

| | |
|--------------------|-----------------------------------|
| SPECIFICATIONS | Öppna 1100 |
| Card type | APC, APT and Aptusnyckel |
| Dimensions (HxWxD) | 116x70x20 mm |
| Power supply | 12 V DC, supplied by control unit |
| Net weight in kg | 0.3 |

Öppna 1100 Proximity Reader



FEATURES AND ADVANTAGES

- ▶ Manufactured in stainless steel.
- ▶ Illuminated keyhole symbol.
- ▶ Surface mounted.
- ▶ May be ordered with inverted logo.
- ▶ Reads proximity cards and keys.
- ▶ Integrated buzzer.
- ▶ Integrated tamper switch.
- ▶ Tamper resistant.
- ▶ For indoor and outdoor use.
- ▶ Can be integrated with other Multiaccess products.
- ▶ Communication between the control unit and reader is encrypted using 32-bit keys.

ACCESS CONTROL

ELECTRICAL DATA

Öppna 1100

| | |
|--------------------|------------------------------|
| Power supply, V DC | 12, supplied by control unit |
| Consumption, Watts | Min 0.36 max 1.56 |
| Amps | Min 0.03 max 0.13 |

ENVIRONMENT

| | |
|-----------------|------------|
| Temperature, °C | -30 to +60 |
| Humidity, % | 10 to 100 |


CONNECTION TO CONTROL UNIT

| | |
|---------------------------------------|-----|
| Control units with programming via PC | |
| 700XX | Yes |
| MC1 | Yes |

DIMENSIONS, mm

| | |
|------------------|-----|
| Height | 116 |
| Width | 70 |
| Depth | 20 |
| Net weight in kg | 0.3 |

17/03/2011 We disclaim any liability for typographical errors and reserve the right to make changes.

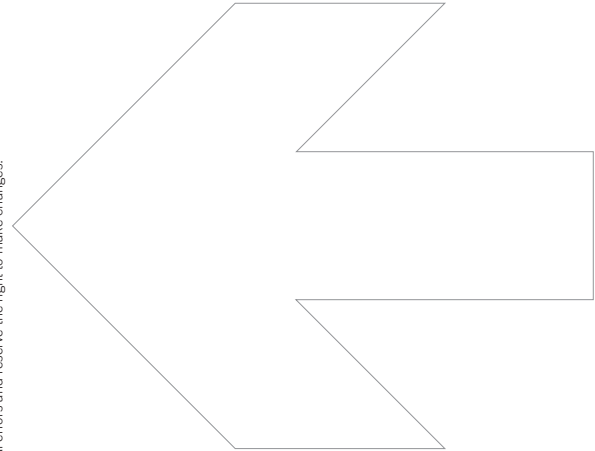

www.aptus.se

Aptus Elektronik AB · Ekonomivägen 3-5, SE 436 33 Askim, Sweden ·
switchboard: +46 (0)31 689 700 **sales:** +46 (0)31 68 97 10
fax: +46 (0)31 68 97 99 · aptus@aptus.se · www.aptus.se